


6-8 PALLET CURTAINSIDER

Dimensions	
Overall Length mm	6 Pallet - 4,500mm // 8 Pallet - 5,500mm
Overall Width mm	2,490mm
Side Aperture Height mm	2,000mm / 2,200mm / 2,440mm
Construction	
Main Rail / Chassis	125 PFC Steel Channel
Cross Members	75 PFC Channel steel cross members
Floor (Option 1)	3mm Steel Chequer Plate
Roof	1 piece aluminium roof skin pre-stressed over cambered roof bows.
Rear Frame	Rear frame designed to suit FRP barn doors or Full Seal Tailgate loader
Rear Doors	25mm FRP rear barns doors with single camlocks per door.
External Specification	
Curtain tensioners	Front curtain tensioners.
Mudguards	Aluminium Guards with GTB Mudflaps
Load Binders	8P (4x) // 6P (3x) Load Binders mounted to kerb side in sliding track with tension bar.
Curtains	Quality Polymar 8556 Curtain material. Choice of colours. Roperail Hooks.
Electrical Specs	
ADR Lighting	All Compulsary Lights are Narva LED and ADR compliant
Tail Lights	OEM tail lights used unless specified otherwise.
Options	
Wind Bubble	Aerodynamic wind bubble mounted to front wall.
Tool Box (GTB)	800mm GTB Roto Moulded Tool Box Mounted to Kerbside
Tool Box (Other)	800mm Steel Tool Box Mounted to Kerbside, Stainless or Black Lid Optional
Tail Lights	Narva LED Tail Lights. Note* Confirmation from OEM if suitable is required prior to fitting.
Tailgates	Rear frame is prepared to suit Tuck Away or Full Seal tailgates.
Water Bottle & Soap Dispenser.	GTB rotomoulded 50L water bottle c/w soap dispenser.
Dock Buffers	Rubber Dock Buffers to rearframe
Load Restraint Curtains	Load Restraint Curtains.
Gates	Steel or Aluminium gates.
Worklamp	1x LED work light mounted on internal rear frame wired into chassis park lights. Switch at roadside rear.
Pull out rear steps	Zinc pull out steps at rear.

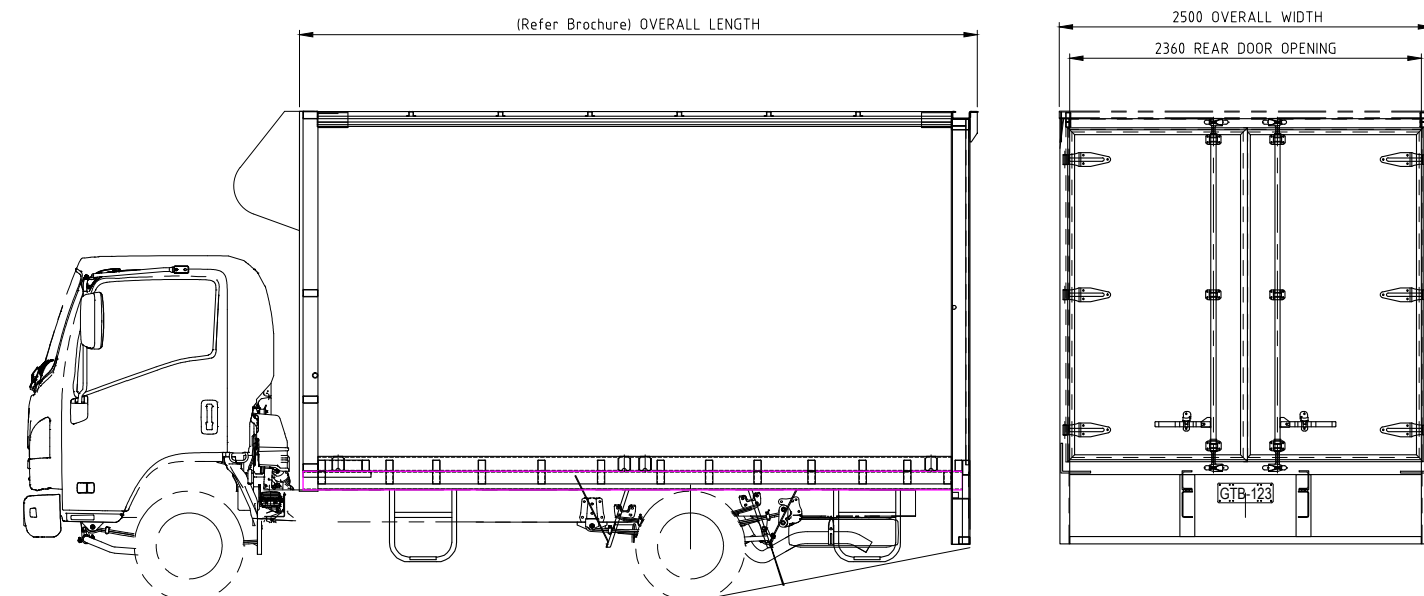

10-14 PALLET CURTAINSIDER

Dimensions	
Overall Length mm	10 Pallet - 6,450mm // 12 Pallet - 7,700mm // 14 Pallet - 8,900mm // 14 Pallet Jumbo - 9,100mm
Overall Width mm	2,490mm
Side Aperture Height mm	2,440mm / 2,600mm / 2,800mm & Max Height - (Jumbo Only)
Construction	
Main Rail / Chassis	150 PFC Steel Channel
Cross Members	75 PFC Channel steel cross members
Floor (Option 1)	3mm Steel Chequer Plate
Floor (Option 2)	5mm Steel Chequer Plate floor pallet jack rated
Roof	1 piece aluminium roof skin pre-stressed over cambered roof bows.
Rear Frame	Rear frame designed to suit FRP barn doors or Full Seal Tailgate loader
Rear Doors	25mm FRP rear barns doors with single camlocks per door.
External Specification	
Curtain tensioners	Front and Rear curtain tensioners.
Mudguards	Aluminium Guards with GTB Mudflaps
Load Binders	14P (7x) // 12P (6x) // 10P (5x) Load Binders mounted to kerb side in sliding track with tension bar.
Curtains	Quality Polymar 8556 Curtain material. Choice of colours. Roperail Hooks.
Electrical Specs	
ADR Lighting	All Compulsary Lights are Narva LED and ADR compliant
Tail Lights	OEM tail lights used unless specified otherwise.
Options	
Wind Bubble	Aerodynamic wind bubble mounted to front wall.
Tool Box (GTB)	800mm, 1000mm, 1200mm GTB Roto Moulded Tool Box Mounted to Kerbside
Tool Box (Other)	800mm, 1000mm, 1200mm Steel Tool Box Mounted to Kerbside, Stainless or Black Lid Optional
Tail Lights	Narva LED Tail Lights. Note* Confirmation from OEM if suitable is required prior to fitting.
Tailgates	Rear frame is prepared to suit Tuck Away, Column, or Full Seal tailgates.
Water Bottle & Soap Dispenser.	GTB rotomoulded 50L water bottle c/w soap dispenser.
Dock Buffers	Rubber Dock Buffers to rearframe
Load Restraint Curtains	Load Restraint Curtains.
Gates	Steel or Aluminium gates.
Worklamp	1x LED work light mounted on internal rear frame wired into chassis park lights. Switch at roadside rear.
Pull out rear steps	Zinc pull out steps at rear.

